

Characteristics

Environmental Specifications


- Operating temperature range: -40°C to +120°C
- Influence of environmental influences: Temperature, humidity and vibrations influence the function

Material & Construction

- Housing: Bakelite + copper
- Element: Copper
- Certifications: RoHS, UL

Installation & Maintenance

- Tightening torque: 40Nm
- Maintenance: Regular visual and contact inspection, release test

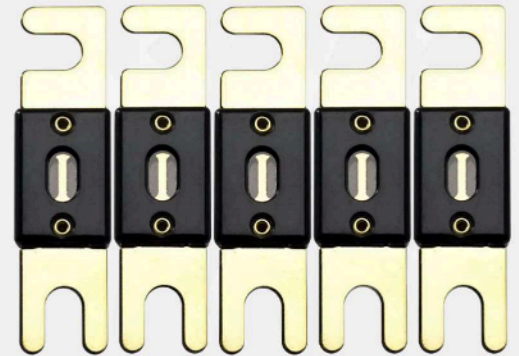

Offgridtec ANL-Fuses			
8-01-018595_001	30A – 72V	8-01-018595_009	150A – 72V
8-01-018595_002	40A – 72V	8-01-018595_010	175A – 72V
8-01-018595_003	50A – 72V	8-01-018595_011	200A – 72V
8-01-018595_004	60A – 72V	8-01-018595_012	250A – 72V
8-01-018595_005	70A – 72V	8-01-018595_013	300A – 72V
8-01-018595_006	80A – 72V	8-01-018595_014	350A – 72V
8-01-018595_007	100A – 72V	8-01-018595_015	400A – 72V
8-01-018595_008	125A – 72V	8-01-018595_016	500A – 72V




About us
Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact
+49 8721 91994-00
info@offgridtec.com
www.offgridtec.com



% of Rating Current	Opening Time Mix/Max (s)			
	40-200A		225A & Above	
	Min	Max	Min	Max
150%	1hr	---	---	---
160%	---	---	60s	---
220%	---	60s	---	60s
250%	0.8s	10s	0.8s	10s
400%	0.2s	2s	0.2s	2s


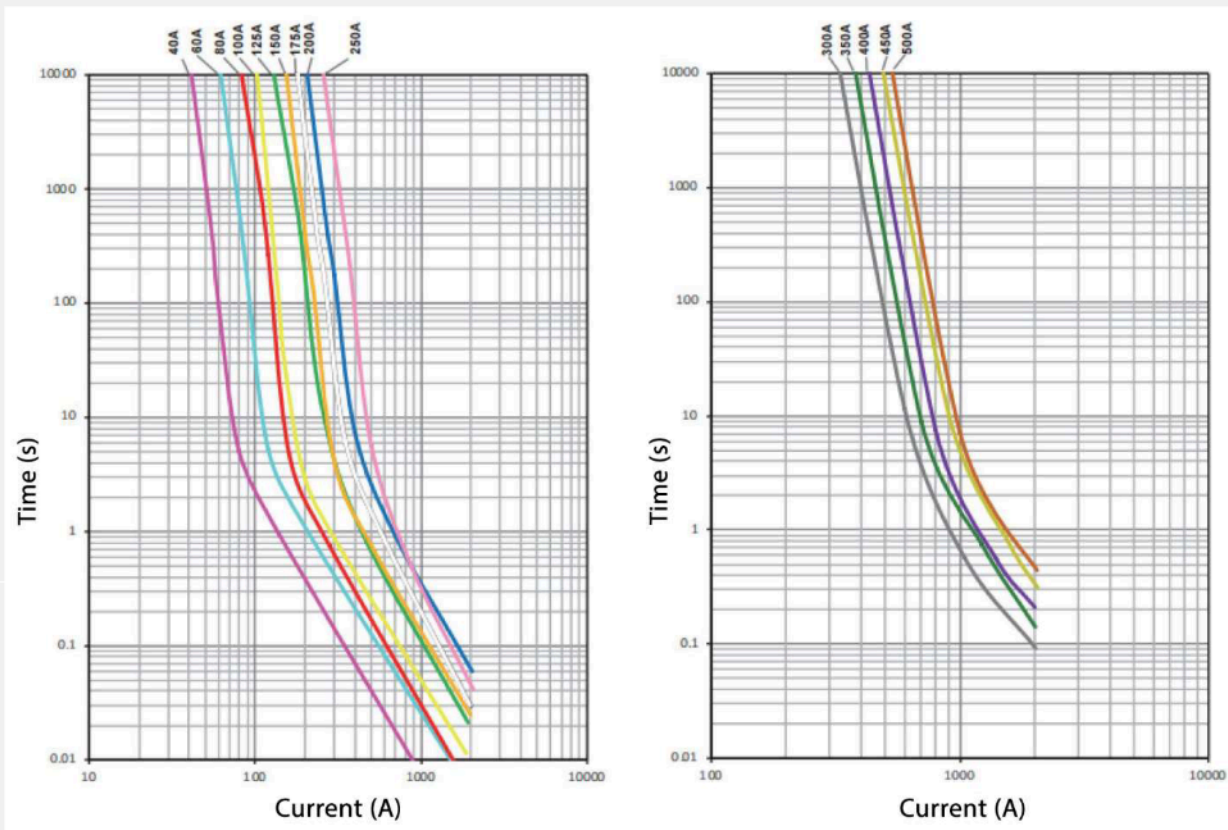


About us
Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact
+49 8721 91994-00
info@offgridtec.com
www.offgridtec.com



Temperature vs Rate Current

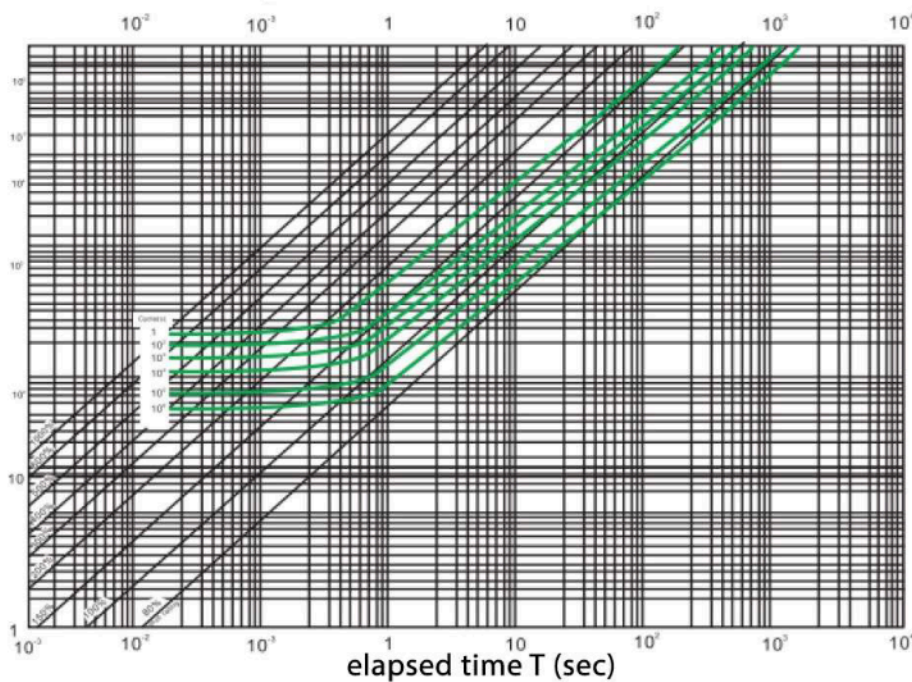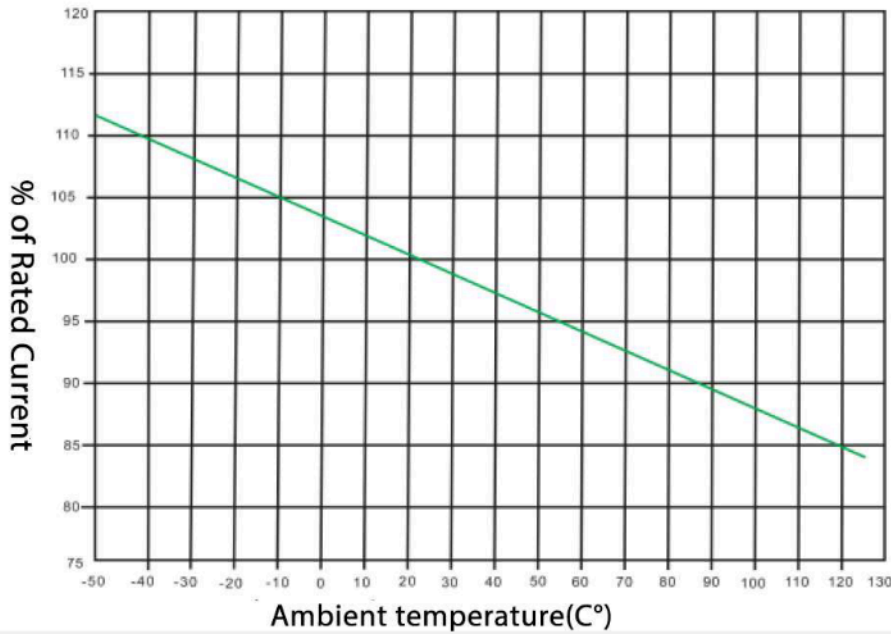

About us
Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact
+49 8721 91994-00
info@offgridtec.com
www.offgridtec.com

