

### Characteristics

#### Environmental specifications

- Operating Temperature Range: -40°C to +120°C
- Influence of environmental influences: Temperature, humidity and vibrations influence the function

#### Material & Construction

- Housing: PC + zinc alloy (30-150A)  
PC + copper (from 150A)
- Element: Zinc alloy or copper
- Certificates: RoHS, UL

#### Installation & Service

- Tightening torque: 30Nm
- Maintenance: Regular visual and contact inspection, trigger test



#### Offgridtec MIDI-Fuses

8-01-013465-30A	30A – 58V
8-01-013465-40A	40A – 58V
8-01-013465-50A	50A – 58V
8-01-013465-60A	60A – 58V
8-01-013465-80A	80A – 58V
8-01-013465-100A	100A – 58V
8-01-013465-125A	125A – 58V
8-01-013465-150A	150A – 58V
8-01-013465-175A	175A – 58V
8-01-013465-200A	200A – 58V






About us  
Offgridtec GmbH  
Im Gewerbepark 11  
84307 Eggenfelden

Contact  
+49 8721 91994-00  
info@offgridtec.com  
www.offgridtec.com



% of Rating Current	Opening Time Min/Max (S)	
	23-125A	150-200A
75	-/-	360,600s/-
100	360,000s/-	-/-
110	14,400s/-	-/-
150	90s/3,600s	-/-
200	3s/100s	1s/15s
300	0.3s/3s	-/-
350	-/-	0.3s/5s
500	0.1s/1s	0.1s/1s

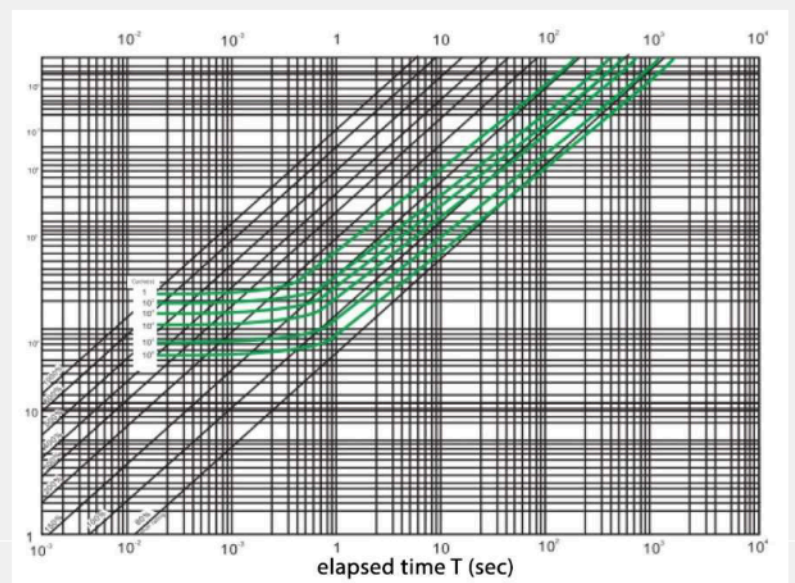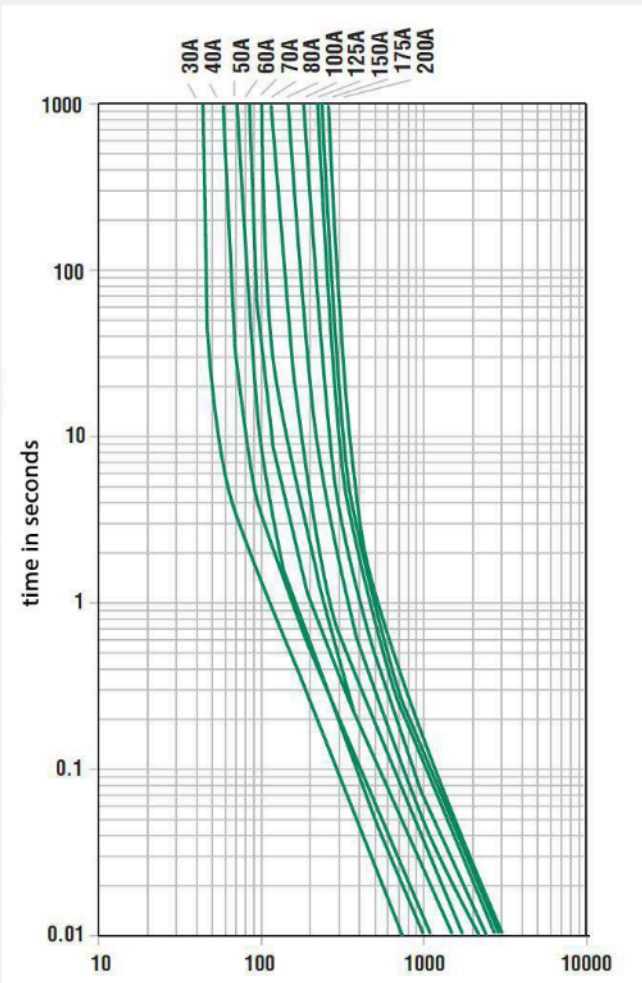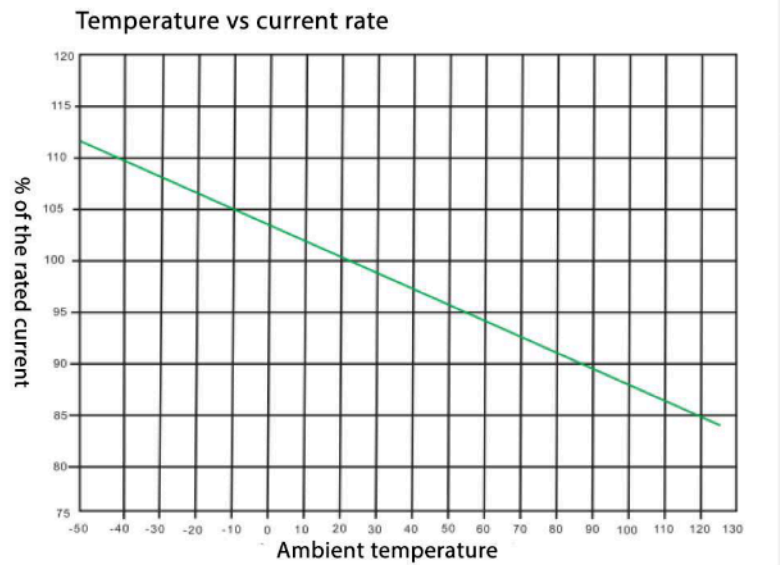

About us  
Offgridtec GmbH  
Im Gewerbepark 11  
84307 Eggenfelden

Contact  
+49 8721 91994-00  
info@offgridtec.com  
www.offgridtec.com

